

## CONE (VL-7502)



Diffused LED Bollard light for LED lamps (E-27)

Mounting heights	301mm - 600mm
Installation anchor size	S.T.S Ø9 X △100mm
Luminous flux [lm]	470[lm] - 806[lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등



### Description

원통을 모티브로 하여 디자인한 CONE은 주변의 식물과의 어울림에 있어서도 크게 눈에 띄지 않도록 적절한 크기의 외형을 갖추고 있는 제품이다. 유백색 폴리카보네이트 파이프를 통해 발산되는 빛은 조경, 공원 등 시민들의 휴식공간에 포근함을 더해준다. 베이스가 같은 다양한 램프와 호환이 가능하며, 여러 공간에 부합될 수 있도록 다양한 크기를 갖추고 있다. 또한 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능한 제품이다.

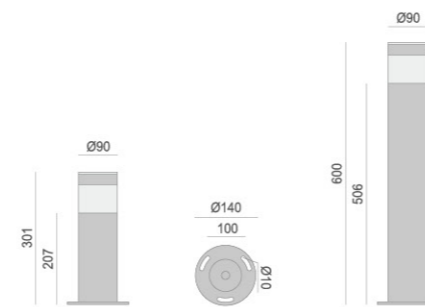

CLASS I 2.36kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
CONE	7502-L7	LED BULB 7W	E-27	AC 220V	470[lm]
HL	7502-L9	LED BULB 9W	E-27	AC 220V	806[lm]

- Material :** Body\_ aluminum die casting. Diffuser\_ 5mm toughened anti UV satin polycarbonate pipe + 10mm toughened satin polycarbonate plate. Decoration\_ steel plate. (direct current electroplating) Pole\_ post extruding aluminum pipe. Lamp holder\_ steel plate. (direct current electroplating) Gasket and seals\_ silicone rubber. Fixings\_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request



Energy Saving  
**55%**  
LED bulb 9W vs EL 20W