

GLIM (VL-7508)



Shielded LED Bollard light for LED lamps (E-27)

Mounting heights	334mm
Installation anchor size	S.T.S Ø9 X □175mm
Luminous flux [lm]	470[lm] - 1,055[lm]
Protection Class	IP65
Certification	KSC 7713 _LED경관등



Description

등불을 모티브로 디자인한 GLIM은 주변의 식물과의 어울림에 있어서도 크게 눈에 띄지 않도록 적절한 크기와 외형을 갖추고 있는 제품이다. 유백색 폴리카보네이트 파이프를 통해 발산되는 빛은 조경, 공원 등 시민들의 휴식 공간에 포근함을 더해준다. 기존 광원 IL 60W를 LED 9W로 대체가 가능하여 85%의 에너지 절약 효과가 있으며, 베이스가 같은 다양한 램프와 호환이 가능하다. 또한 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능한 제품이다.

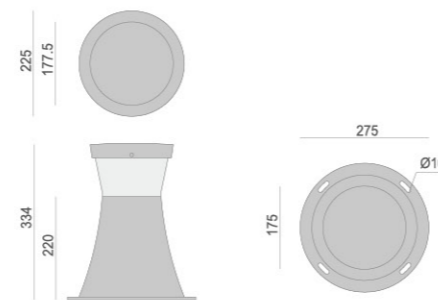

CLASS I 2.8kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
	7508-L7	LED BULB 7W	E-27	AC 220V	470[lm]
GLIM 글림	7508-L9	LED BULB 9W	E-27	AC 220V	806[lm]
	7508-L13	LED BULB 13W	E-27	AC 220V	1,055[lm]

- Material :** Body_ aluminum die casting. Diffuser_ 4mm toughened anti UV satin PET. Top cover_ aluminum die casting. Pole_ aluminum die casting. Lamp holder_ steel plate. (direct current electroplating) Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request



Energy Saving
85%
LED bulb 9W vs IL 60W