

BASIC (VL-7015)


Shielded LED Bollard light for LED lamps (E-27)

Mounting heights	521mm - 840mm
Installation anchor size	S.T.S Ø9 X □120mm or Ø9 X △70mm
Luminous flux [lm]	470[lm] - 1,055[lm]
Protection Class	IP67
Certification	KS C 7713 _ LED 경관등




Description

기본적인 형태의 조명기구인 BASIC은 정갈한 조명 연출이 필요한 곳에 적합하도록 디자인한 외형이 특징적이다. 직접조명이지만 간접조명의 효과를 연출 할 수 있도록 디자인한 실드를 통해 발산되는 빛은 광원이 노출되지 않는 방식의 조명연출이 필요한 곳에 적용하기에 좋다. 베이스가 같은 다양한 램프와 호환 가능하며, 여러 공간에 부합될 수 있도록 다양한 크기를 갖추고 있다. 또한 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능한 제품이다.

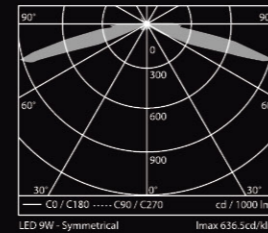


Energy Saving
44%
LED bulb 13W vs EL 23W

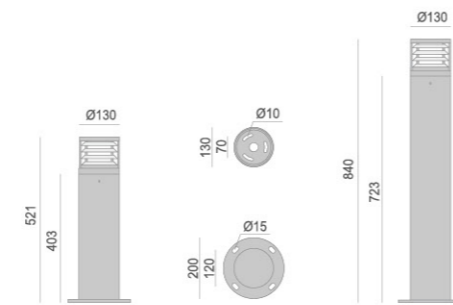

CLASS I 5.15kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
BASIC 베이지	7015-L7	LED BULB 7W	E-27	AC 220V	470[lm]
	7015-L9	LED BULB 9W	E-27	AC 220V	806[lm]
	7015-L13	LED BULB 13W	E-27	AC 220V	1,055[lm]

- Material :** Body_ aluminum die casting. Diffuser_ 6mm toughened anti UV clear polycarbonate pipe. Shield_ steel plate specular. Support bolt_ stainless steel. Pole_ post extruding aluminum pipe. Lamp holder_ steel plate. (direct current electroplating) Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Vents :** Waterproof protective lamp vent (IP67)
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Paint Color :** Dark gray painted (Standard) / Another paint color on request
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
Standard anchor base size (Ø9 X □120mm)
Option anchor (Ø9 X △70mm) on request



_Anchor detail

