

CRESCENT SERIES-CLOSE (VL-7003)


Shielded LED Bollard light for LED lamps (E-27)

Mounting heights	476mm - 750mm
Installation anchor size	S.T.S Ø9 X □120mm or Ø9 X △70mm
Luminous flux [lm]	470[lm] - 806[lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등




Description

초승달을 모티브로 디자인한 CRESCENT는 어두운 밤을 밝혀 주는 달처럼 은은한 빛을 가진 조명기구이다. 상부의 유백색 폴리카보네이트를 통해 연출되는 빛은 조경, 공원 등의 공간을 돋보이게 해주며 시민의 안내등 역할을 해준다. 그리고 하부를 통해 연출되는 빛은 초승달을 연상케 하는 조명연출로 아늑하고 편안한 시민 휴식공간을 만들어 준다. 또한 LED, 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능하며, LED 램프 사용으로 어디서든 쉽게 구매를 할 수 있어 유지관리가 수월한 제품이다.

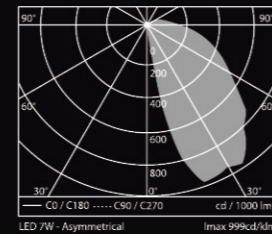


Energy Saving
54%
LED bulb 7W vs EL 15W

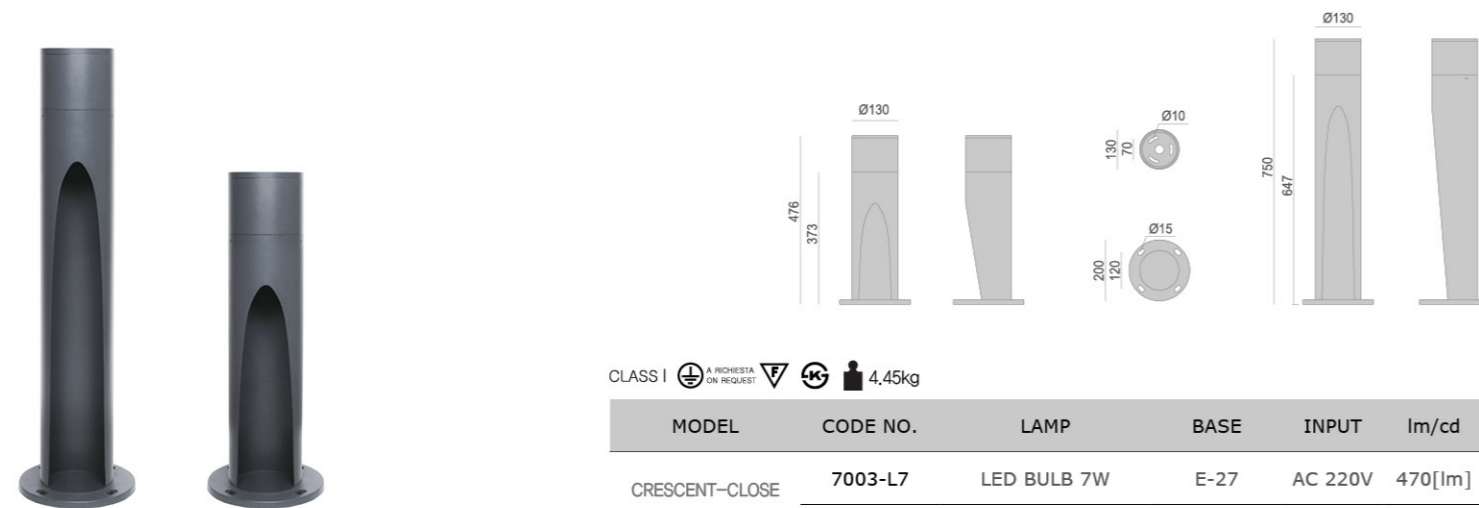

CLASS I 4.45kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
CRESCENT-CLOSE	7003-L7	LED BULB 7W	E-27	AC 220V	470[lm]
크레센트-크로스	7003-L9	LED BULB 9W	E-27	AC 220V	806[lm]

- Material :** Body_ aluminum die casting. Diffuser_ polycarbonate pipe. End cap_ aluminum die casting. Pole_ post extruding aluminum pipe. Converter & led & lamp holder_ steel plate. (direct current electroplating) Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Vents :** Waterproof protective lamp vent (IP67)
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Paint Color :** Dark gray painted (Standard) / Another paint color on request
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request



_Anchor detail

