

INVERTED (VL-7020)


Shielded LED Bollard light for LED PCB type

Mounting heights	844mm
Installation anchor size	S.T.S Ø9 X □120mm or Ø9 X △70mm
Luminous flux [lm]	960[lm] - 1,600[lm]
Protection Class	IP65
Certification	KSC 7713 _LED경관등




Description

조명기구의 위치를 도치시켜 높은 모양을 모티브로 디자인한 INVERTED는 하부 투사 방식의 조명기구이다. 유백색 커버를 통해 투사되는 간접조명의 빛은 부드러운 공간을 연출하며, 사방으로 퍼지는 빛은 광원이 노출되지 않는 방식의 조명연출이 필요한 곳에 적용하기에 좋은 제품이다. 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능한 제품이다.



Energy Saving
43%
LED 20W vs Metal halide 35W

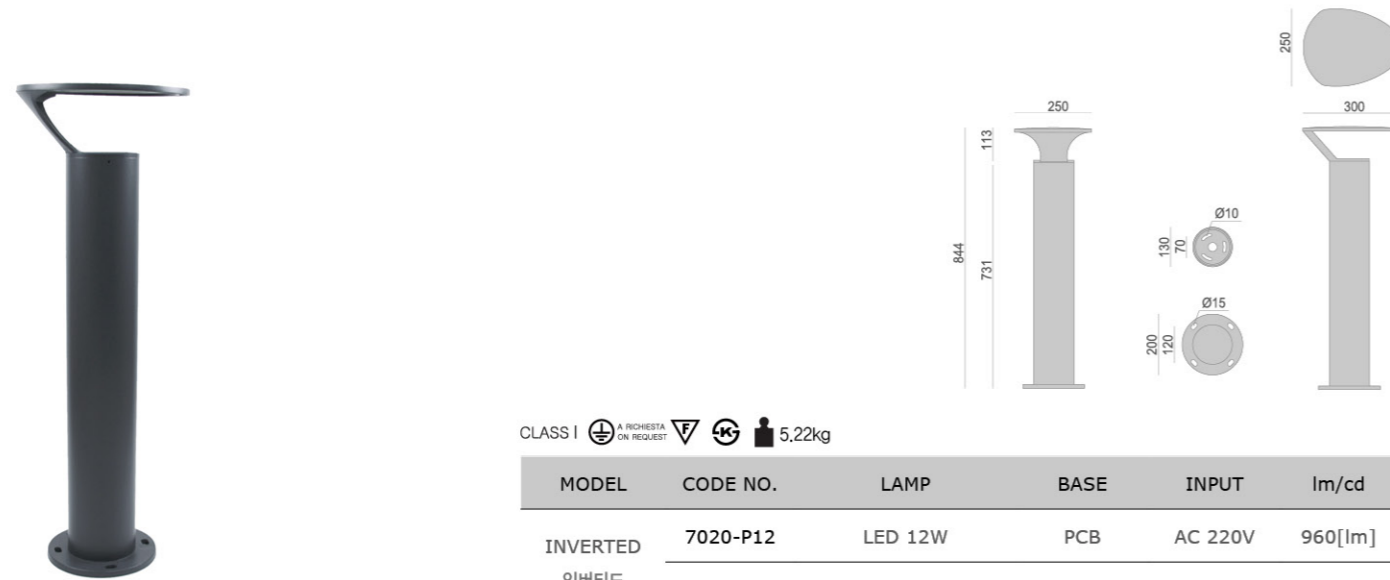


CLASS I 5.22kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
INVERTED	7020-P12	LED 12W	PCB	AC 220V	960[lm]
인버티드	7020-P20	LED 20W	PCB	AC 220V	1,600[lm]

- Material :** Body_ aluminum die casting. Diffuser_ 3mm toughened anti UV satin polycarbonate. Top cover_ aluminum die casting. Decoration_ aluminum die casting. Pole_ post extruding aluminum pipe. Converter holder_ steel plate. (direct current electroplating) Gasket and seals_ silicone rubber. Fixings_ stainless steel screws
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Paint Color :** Dark gray painted (Standard) / Another paint color on request
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request

Standard anchor base size (Ø9 X □120mm)
Option anchor (Ø9 X △70mm) on request



_Anchor detail

