

## V9 (VL-7005)


Shielded LED Bollard light for LED PCB type

Mounting heights	474mm - 750mm
Installation anchor size	S.T.S Ø9 X W150mm X D50mm
Luminous flux [lm]	960[lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등




### Description

빛이 들어오는 밝은 창을 모티브로 하여 디자인한 V9은 따사로운 햇살이 어두운 곳을 환하게 밝혀 주듯 어두운 밤 사람들의 밝은 창 역할을 해 줄 조명기구이다. 전면 커버를 사선으로 디자인하여 균일한 조도 확보가 가능하며, 유백색 폴리카보네이트를 통해 양방향으로 연출되는 빛은 조경, 공원 등의 공간을 은은하고, 편안하게 연출 할 것이다. 또한 LED, 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능하다.



Energy Saving  
40%  
LED 12W vs Metal halide 20W

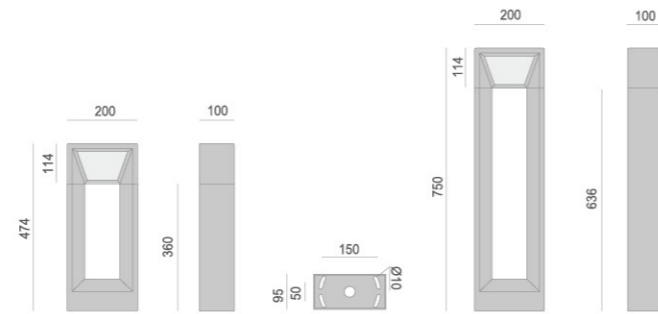

CLASS I 5.31kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
V9 브이나인	7005-P12	LED 12W	PCB	AC 220V	960[lm]

- Material :** Body\_ aluminum die casting. Diffuser\_ 4mm toughened anti UV milky polycarbonate. Pole\_ steel pate. (direct current electroplating) LED fixed\_ steel plate. (direct current electroplating) Gasket and seals\_ silicone rubber. Fixings\_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request

