

## WATER DROP (VL-7022) / GAILY (VL-7023)

Diffused LED Bollard light for MONO & R.G.B mixing LED PCB type & LED lamps (E-27)

Mounting heights	840mm
Installation anchor size	S.T.S Ø9 X □120mm
Luminous flux [lm]	860[lm] - 1,960[lm]
Protection Class	IP67
Certification	KS C 7713 _LED 경관등



### Description


물방울 모양을 모티브로 해서 디자인한 WATER DROP 은 조도확보 및 타공 부분에서 나오는 빛이 특징이다. 또한 불규칙적인 형태의 타공을 모티브로 해서 디자인한 GAILY는 내부에서 발광되는 빛을 이용하여 바닥면에 투사되는 빛이 특징인 조명기구이다. 화려한 외형과 그 안에서 연출되는 빛은 공간에 상징적인 역할을 하며, 생동감 넘치는 조명방식이 요구되는 곳에 적용하기 좋은 제품이다. 기존 할로겐 75W를 LED 11W로 대체가 가능하며, 86%의 에너지 절약 효과가 있으며, 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능한 제품이다.



<b>Material :</b>	Body_ aluminum die casting. Diffuser_ 6mm toughened anti UV milky polycarbonate. Cover frame_ stainless steel plate. (direct current electroplating) Housing_ stainless steel pipe. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
<b>Finishing :</b>	Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
<b>Vents :</b>	Waterproof protective lamp vent (IP67)
<b>Adjustment :</b>	Fixed lighting fixture
<b>Power :</b>	Electronic power supply unite included
<b>Input Voltage :</b>	AC 220~240V 60Hz
<b>Control Gear :</b>	Sub-controller included
<b>Options :</b>	Remote divers on request (Dimming, color change) Cable lengths on request
<b>Paint Color :</b>	Gray painted (Standard) / Another paint color on request



Energy Saving  
86%  
LED par30 11W vs Par30 75W

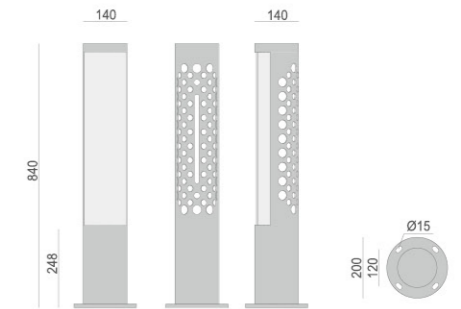


CLASS I 6.45kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
WATER DROP 워터드롭	7022-L11	LED PAR30 11W	E-27	AC 220V	860[lm]
	7022-L15	LED PAR30 15W	E-27	AC 220V	1,250[lm]
	7022-P28	LED 14W X 2	PCB	AC 220V	1,960[lm]



Energy Saving  
49%  
LED 14W x 2 vs T5 54W

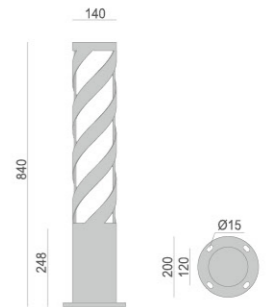

CLASS I 6.87kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
GAILY 게일리	7023-L11	LED PAR30 11W	E-27	AC 220V	860[lm]
	7023-L15	LED PAR30 15W	E-27	AC 220V	1,250[lm]
	7023-P28	LED 14W X 2	PCB	AC 220V	1,960[lm]