

GEOMETRY (VL-3012)



Directed parking Ramp lights for LED PCB type

Beam angle	Symmetrical
Luminous flux [lm]	1,410[lm] - 2,820[lm]
Protection Class	IP65
Certification	KS C 7712 (LED 투광등기구)



Description

터널, 지하주차장, 창고, 대형 물류창고 등에 적용할 수 있는 GEOMETRY는 알루미늄 몸체와 폴리카보네이트 커버로 견고한 내구성, 내식성을 갖춘 제품이다. 또한 커버 기술기에 맞추어 엘이디와 방열판을 디자인하여 안정적이고 균일한 조도 확보를 할 수 있게 설계하였으며, 직사각형에 기하학적인 디자인 요소를 가미시켜 주변 환경과 어울릴 수 있게 디자인 하였다. 그리고 긴 수명과 전력소비 절감으로 녹색성장에 부응하는 저탄소 무공해 물질의 친환경 제품이다.

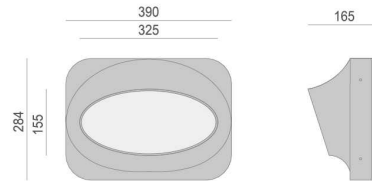

RoHS Compliant, CE, 6.2kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
GEOMETRY (지오메트리)	3012-P20	LED 20W	PCB	AC 220V	1,410[lm]
	3012-P40	LED 40W	PCB	AC 220V	2,820 [lm]

- Materials :** Body_ aluminum die casting. Diffuser_ 3mm toughened asetal polycarbonate. Cover frame_ aluminum die casting. Heat sink_ aluminum die casting. Attach bracket_ steel plate(direct current electroplating). Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anti-corrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Paint Color :** Dark gray painted (Standard) / Another paint color on request
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Option :** Cable lengths on request



서울, 아현3구역 레미안, 푸르지오

Energy Saving
74%
LED 40W vs Metal halide 150W