

BAND-208 (VL-4001)


Directed down lights for LED PCB type & external power-supply units

Beam angle	Symmetrical
Luminous flux [lm]	1,540[lm]
Recessed hole size [mm]	Ø190
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등




Description

천정매입형 다운라이트인 BAND208은 스테인레스 스틸 커버 내부 프레임 양측면에 있는 볼트를 돌려 천정 마감재에 고정시키는 방식의 조명기구로, 방습 방진을 완벽한 구조를 해결한 제품이다. 또한 연색성과 광속이 우수한 SMD 엘이디 소자를 채택하여, 고른 배광분포와 부드러운 빛으로 공간을 드라마틱하게 연출시킬 수 있는 조명기구이다. 심플하면서도 모나지 않는 디자인으로 필요한 조명연출 효과를 표현하는데 최적의 조명기구이다.

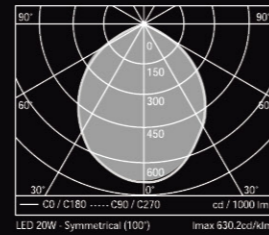

Energy Saving
43%
LED 20W vs Metal halide 35W

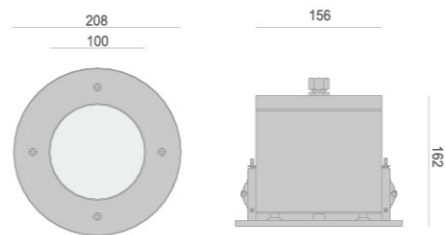

CLASS I 2.3kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
BAND-208 밴드	4001-P20	LED 20W	PCB	AC 220V	1,540[lm]

- Material :** Body_ aluminum die casting. Diffuser_ 4mm toughened tempered glass. Cover frame_ 7mm toughened stainless steel plate. Fixing clip_ stainless steel screws clip. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Included electronic power supply unite
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request

