

## BONY (VL-4003)


Directed ceiling lights for LED PCB type & LED lamps (E-27)

Beam angle	Symmetrical
Luminous flux [lm]	860[lm] - 1,200[lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등




### Description

BONY는 알루미늄 프레임과 강화유리로 재질을 채택하여 내구성이 우수하며, 건축물의 복도, 천정 등의 공간에 적절히 활용될 수 있도록 제작한 제품이다. 또한 조명기구 내부에 고조도 반사판을 적용하여, 조도보완과 은은하게 퍼지는 조명 효과가 있으며, 온도와 습기에 취약한 엘이디 소자의 특성을 고려하여 실리콘 가스켓의 완벽한 설계를 통해 방열, 방습을 해결하였다. BONY는 전원공급장치가 내장되어 유지보수 및 설치가 용이하며, 견고한 외관을 토대로 안정된 직접조명을 연출하는데 있어 최적의 제품이다.

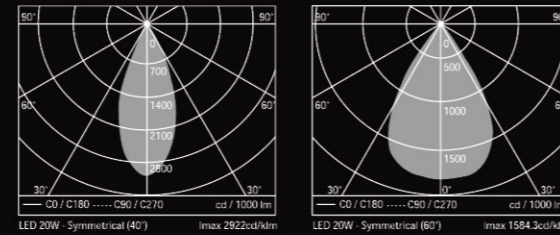

Energy Saving  
86%  
LED par30 11W vs Par30 75W

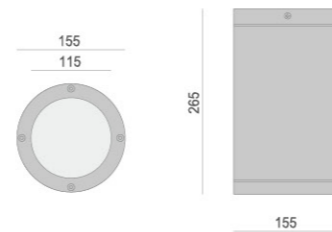

CLASS I 2.25kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
	4003-L11	LED PAR30 11W	E-27	AC 220V	860[lm]
BONY 보니	4003-L18	LED PAR38 18W	E-27	AC 220V	1,200[lm]
	4003-L20	LED PAR30 20W	E-27	AC 220V	1,120[lm]

- Material :** Body\_ aluminum die casting. Reflector\_ high grade angulate aluminum. Dif-fuser\_ 8mm toughened clear tempered glass. Cover frame\_ aluminum die casting. Gasket and seals\_ silicone rubber. Attach bracket\_ stainless steel plate. Fixings\_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Gray painted (Standard) / Another paint color on request

