

## TILT (VL-1003)



Tree flood lights for MONO COB LED PCB type

Beam angle	Symmetrical
Luminous flux [lm]	956[lm] - 1,380[lm]
Protection Class	IP65
Certification	KS C 7712 _ LED 투광등기구



### Description

수평, 수직으로 각도조절 자유자재로 할 수 있게 디자인한 TILT는, 고연색성 COB 엘이디 소자와 고조도 반사판을 사용하여 광효율을 높인 제품이다. 건축물 외벽, 조형물, 수목조명에 최적에 빛의 공간연출로 야간조명을 더욱 돋보이게 할수 있으며, 또한 전원공급장치가 내장되어 편리하게 설치 및 유지보수가 가능하다. 주변 경관에 잘 어울릴 수 있는 산뜻한 외형으로 외부조명에 있어서의 선택적인 조명효과 창출에 쉽게 응용할 수 있는 제품이다.

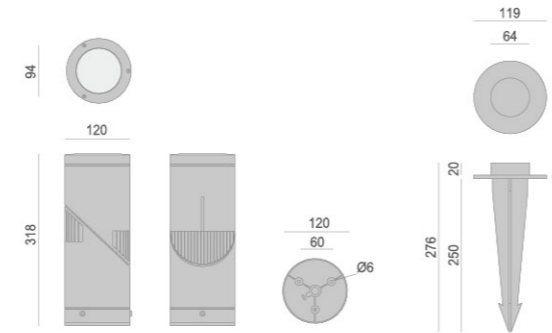

CLASS I 2.7kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
TILT	1003-C15	LED 15W	COB	AC 220V	956[lm]
틸트	1003-C20	LED 20W	COB	AC 220V	1,380[lm]

- Material :** Body\_ aluminum die casting. Diffuser\_ 6mm toughened clear tempered glass. Cover frame\_ aluminum die casting. Converter box\_ aluminum die casting. Ground picket\_ aluminum die casting. Gasket and seals\_ silicone rubber. Fixings\_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV -resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Adjustable verticality 270° / horizontality 350°
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Accessories :** Aluminum ground picket
- Paint Color :** Dark gray painted



Energy Saving  
**43%**  
LED 20W vs Metal halide 35W