


## ECLIPSE SERIES-GAMUT (VL-6002)



Waterproof in-ground lights for MONO & R.G.B mixing LED PCB type

Fixture height	100mm
Beam angle	Whole light output
Luminous flux [lm]	63[lm]
Protection Class	IP67
Certification	KS C 7713 _ LED 경관등

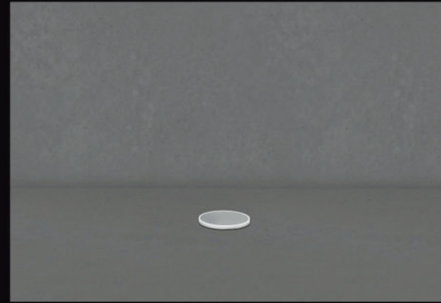

### Description

기존 지중 매입 시선유도등과 달리 TRIM RING을 없애 원형의 심플한 ECLIPSE-GAMUT는 유백색 커버를 통해 은은하면서 부드러운 빛 연출로 보행자에게 안락함을 줄 수 있는 제품이다. 또한 개별적으로 서브 콘트롤러 내장이 가능해서, 다양한 색상과 디밍 연출로 산책로, 육교, 교량 등에 쾌적하고 편안한 분위기의 빛의 환경을 제공할 것이다. 실리콘 가스켓의 완벽한 설계를 통해 방열, 방습을 해결하여, 온도와 습기에 취약한 엘이디 소자의 보호하고 있는 조명기구이다.

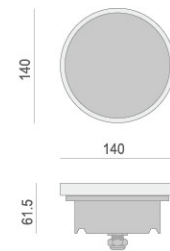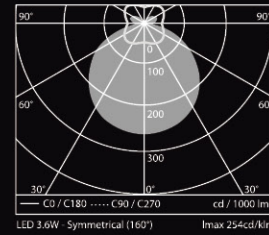

CLASS III      0,9kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
ECLIPSE GAMUT 이클립스-가머트	6002-P3.6	LED 3.6W	PCB	DC 24V	63[lm]

- Material :** Body\_ aluminum die casting. Diffuser\_ 15mm toughened anti UV satin polycarbonate. Decoration cover\_ stainless steel plate. Heat sink\_ aluminum die casting. Housing\_ stainless steel pipe. Gasket and seals\_ silicone rubber.
- Finishing :** Fixings\_ stainless steel screws.  
Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** UV resistant, exterior paint system, thermally cured at 200 °C
- Power :** Fixed lighting fixture
- Input Voltage :** Electronic power supply unite excluded
- Control Gear :** DC 24V
- Options :** Sub-controller included (Request on external sub-controller)  
Remote divers on request (Dimming, color change)  
Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request



Energy Saving  
82%  
LED 3.6W vs Halogen 20W