


## ECLIPSE SERIES-ONE/TWO/FOUR WAY (VL-6004)




Waterproof in-ground lights for MONO & R.G.B mixing LED PCB type

Fixture height	100mm
Beam angle	One / Two / Four-sided light output
Luminous flux [lm]	20[lm] – 45[lm]
Protection Class	IP67
Certification	KS C 7713 _ LED 경관등

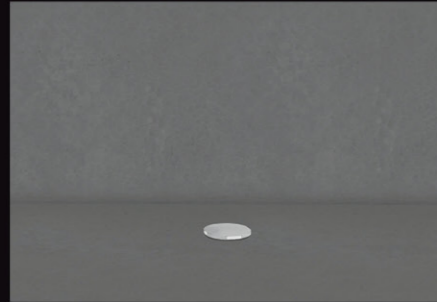


### Description

원형 형태의 패스형 조명기구인 ECLIPSE-ONE/TWO/FOUR WAY는 투명 폴리카보네이트 커버와 스테레스 스틸 커버 프레임을 이용하여, 1방향, 2방향, 4방향으로 비추는 방식으로 빛이 연출되는 시선유도 조명기구이다. 은은 하면서 부드러운 빛 연출로 보행자에게 안락함을 줄 수 있는 제품으로 개별적으로 서브 콘트롤러 내장이 가능해 서, 다양한 색상과 디밍 연출로 산책로, 육교, 교량 등에 쾌적하고 편안한 분위기의 빛의 환경을 제공할 수 있게 디자인 하였다. 또한 알루미늄과 스테레스 스틸을 몸체 재질로 채택하여, 내구성, 내부식성 등이 우수한 제품이다.



Energy Saving  
82%  
LED 3.6W vs Halogen 20W

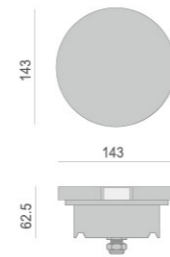


CLASS III 0.94kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
ECLIPSE ONE WAY 이클립스-원웨이	6004-PO3.6	LED 3.6W	PCB	DC 24V	20[lm]



Energy Saving  
82%  
LED 3.6W vs Halogen 20W




CLASS III 0.96kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
ECLIPSE TWO WAY 이클립스-투웨이	6004-PT3.6	LED 3.6W	PCB	DC 24V	40[lm]



Energy Saving  
82%  
LED 3.6W vs Halogen 20W



CLASS III 0.94kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
ECLIPSE FOUR WAY 이클립스-포웨이	6004-PF3.6	LED 3.6W	PCB	DC 24V	45[lm]



- Material :** Body\_ aluminum die casting. Diffuser\_ 15mm toughened anti UV clear polycarbonate. Cover frame\_ stainless steel plate. Heat sink\_ aluminum die-casting. Heat sink\_ aluminum die casting. Housing\_ stainless steel pipe. Gasket and seals\_ silicone rubber.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite excluded
- Input Voltage :** DC 24V
- Control Gear :** Sub-controller included (Request on external sub-controller)
- Options :** Remote divers on request (Dimming, color change)  
Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request