





PLUTO-18/36 (VL-6011)


Waterproof in-ground lights for MONO & R.G.B mixing LED PCB type

Fixture height	183mm
Beam angle	Symmetrical
Luminous flux [lm]	920[lm] - 1,259[lm]
Protection Class	IP67
Certification	KS C 7713 _ LED 경관등

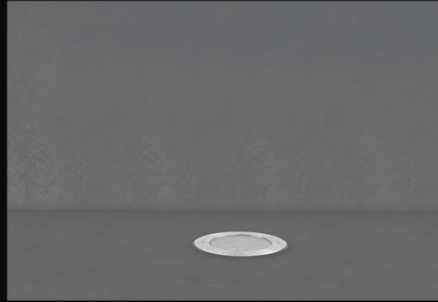

Description

광속이 요구되는 장소에서 지중조명 역할을 수행해줄 수 있는 PLUTO는 투명 강화유리 타입으로 사용할 경우 고 광속 지중조명으로 벽면, 기둥, 수목 등에 적용할 경우 건축물의 윤곽선과 수목의 풍성함을 느낄 수 있는 제품이다. 또한 스테인레스 스틸 커버 프레임이 돌출되지 않아 수평면을 맞춰 깔끔한 마감처리가 가능하며, 온도와 습기에 취약한 엘이디 소자의 특성을 고려하여 실리콘 가스켓의 완벽한 설계를 통해 방열, 방습, 방진을 해결한 제품이다. 서브 콘트롤러를 조명기구 내부에 장착할 수 있어 설치 및 유지보수가 용이한 제품이다.

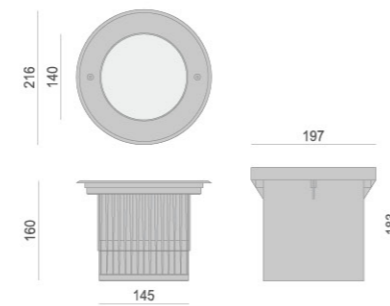

CLASS III 2.86kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
PLUTO	6011-P18	LED 18W	PCB	DC 24V	920[lm]
플루토	6011-P36	LED 36W	PCB	DC 24V	1,259[lm]

- Material :** Body_ aluminum die casting. Diffuser_ 6mm toughened clear tempered glass. Cover frame_ 3mm toughened stainless steel plate. Heat sink_ aluminum die casting. Housing_ acrylonitrile butadiene styrene resin box. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Vents :** Waterproof protective lamp vent (IP67)
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite excluded
- Input Voltage :** DC 24V
- Control Gear :** Sub-controller included (Request on external sub-controller)
- Options :** Remote divers on request (Dimming, color change)
Cable lengths on request
- Paint Color :** Natural stainless steel, Black painted (Standard) / Another paint color on request



Energy Saving
49%
LED 36W vs Metal halide 70W