





BICHAE POWER (VL-2005)

Power LED bar lights for MONO & R.G.B mixing LED PCB type

Beam angle	Symmetrical
Luminous flux [lm]	2,196[lm] - 3,294[lm]
Protection Class	IP67
Certification	KS C 7713 _ LED 경관등

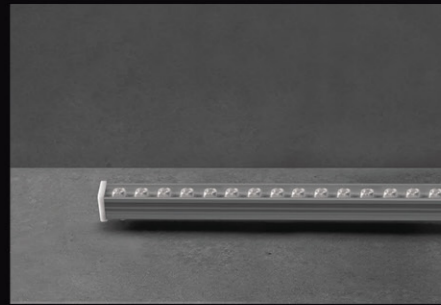


Description

벽면, 케노피 등의 장소에 투광 목적으로 디자인한 BICHAE POWER는 소자의 속성에 철저히 대비하여 몸체를 알루미늄으로 자체 방열이 가능하도록 설계 하였으며, 슬림형 POWER LED를 사용하여 기존 제품들에 비해 조도, 휘도를 향상시킨 제품이다. 또한 내구성, 내부식성 등이 우수하여 교량, 공원 아파트 경관조명 연출에 사용 가능하며, 다양한 배광을 구현할 수 있도록 각기 다른 빔각도의 옵틱 렌즈를 설치 할 수 있도록 디자인 하였다.



Energy Saving
34%
LED 36W vs T5 54W

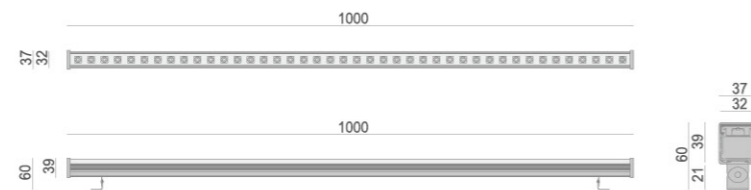

CLASS III A REQUEST ON REQUEST 0.79kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
BICHAE POWER	2005-P36	LED 36W	PCB	DC 24V	2,196[lm]
비채 파워	2005-P54	LED 54W	PCB	DC 24V	3,294[lm]

- Material :** Body_ post extruding aluminum. Diffuser_ 2mm toughened anti UV clear polycarbonate. End-cap_ injection molding plastic. Adjust bracket_ stainless steel plate. Heat sink_ post extruding aluminum. Gasket and seals_ silicone & epoxy. Fixings_ stainless steel screws.
- Finishing :** Aluminum anodizing
- Adjustment :** Adjustable verticality 270°
- Power :** Electronic power supply unite excluded
- Input Voltage :** DC 24V
- Control Gear :** Sub-controller included(Request on external sub-controller)
- Options :** Remote divers on request (Dimming, color change)
Cable lengths on request
- Finished Color :** Natural aluminum anodizing



BICHAE POWER® 용인, 행정복합타운 개선평사