


LINEAR (VL-2001)



Ultra slim LED bar lights for MONO & R.G.B mixing LED PCB type

Beam angle	Symmetrical
Luminous flux [lm]	988[lm]
Protection Class	IP67
Certification	KS C 7713 _ LED 경관등

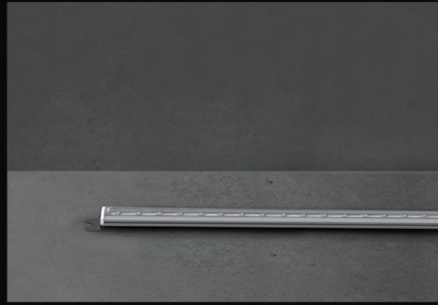

Description


심플한 디자인의 LINEAR는 강렬하고 은은한 색상을 연출하는데 효과적인 제품이며, 스테레스 스틸 재질의 브라켓을 이용하여 5° 단위로 각도조절이 가능하다. 또한 고른 배광분포로 실내, 실외 간접조명으로 적용하는데 탁월한 LINEAR는 알루미늄을 몸체 재질로 채택하여 내구성, 내부식성 등이 우수한 제품으로 월위셔의 목적으로 사용되어 안정적인 빛을 창출할 수 있는 제품이다.

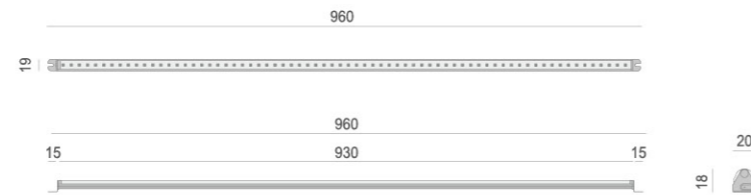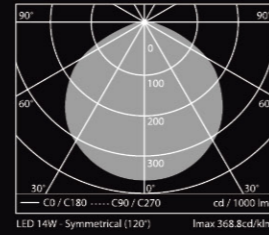

CLASS III 0,26kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
LINEAR 리니어	2001-P14	LED 14W	PCB	DC 24V	988[lm]

- Material :** Body_ post extruding aluminum. Diffuser_ 2mm toughened anti UV clear polycarbonate. End-cap_ injection molding plastic. Adjust bracket_ stainless steel plate. Heat sink_ post extruding aluminum. Gasket and seals_ silicone & epoxy.
- Finishing :** Aluminum anodizing
- Adjustment :** Adjustable 360°
- Power :** Electronic power supply unite included
- Input Voltage :** DC 24V
- Control Gear :** External sub-controller
- Options :** Remote divers on request (Dimming, color change)
Cable lengths on request
- Finished Color :** Natural aluminum anodizing

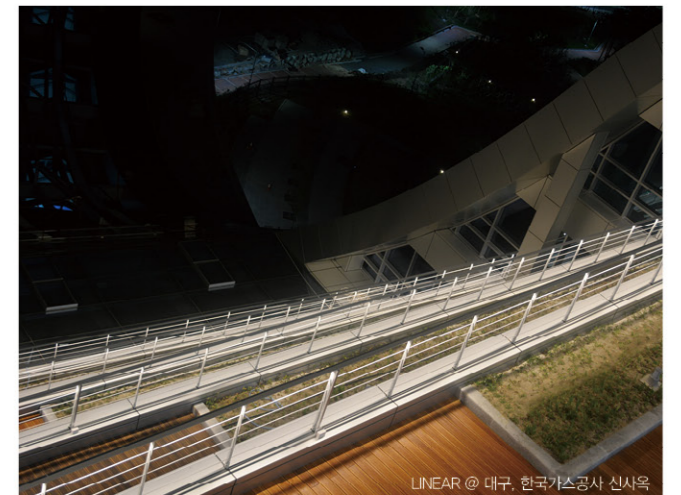

Energy Saving
42%
LED 14W vs T5 24W