


## RECTANGLE(VL-2003)




Slim LED bar lights for MONO & R.G.B mixing LED PCB type

Beam angle	Symmetrical
Luminous flux [lm]	712[lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등

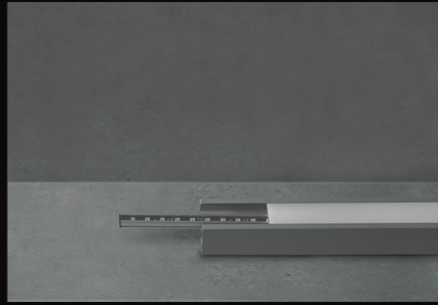

### Description

다양한 연출이 가능한 RECTANGLE은 강렬한 라인조명과 은은한 간접조명을 동시에 해결을 할 수 있는 조명기구로 커버 투명도에 따라 연출 효과가 다르게 표현된다. 또한 실외 간접조명으로 적용하는데 탁월한 RECTANGLE은 알루미늄을 몸체 재질로 채택하여 내구성, 내부식성 등이 우수한 제품으로 월위셔의 목적으로 사용되어 안정적인 빛을 창출할 수 있는 제품이다.

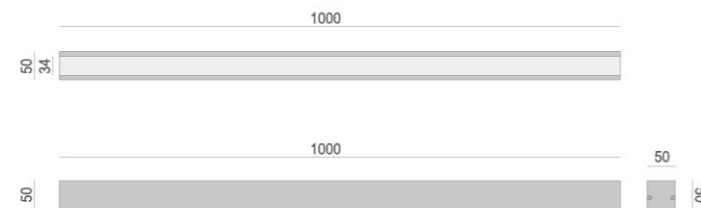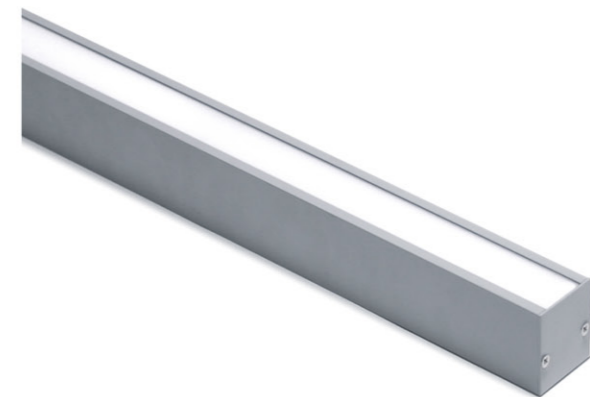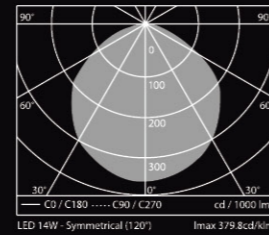

CLASS III 0,8kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
RECTANGLE 래탱글	2003-P14	LED 14W	PCB	DC 24V	712[lm]

- Material :** Body\_ post extruding aluminum. Duct\_ post extruding aluminum. Diffuser\_ 1.5mm toughened anti UV clear polycarbonate. End-cap\_ aluminum plate. Heat sink\_ post extruding aluminum. Gasket and seals\_ silicone & epoxy.
- Finishing :** Aluminum anodizing
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite excluded
- Input Voltage :** DC 24V
- Control Gear :** Sub-controller included(Request on external sub-controller)
- Options :** Satin polycarbonate diffuser or clear polycarbonate diffuser  
Remote divers on request (Dimming, color change)  
Cable lengths on request
- Finished Color :** Natural aluminum anodizing



Energy Saving  
42%  
LED 14W vs T5 24W