


OBLONG FLAT (VL-5002)


Recessed step lights for LED PCB type & power-supply units

Beam angle	Symmetrical
Luminous flux [lm]	210[lm]
Recessed size	237mm X 74mm
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등

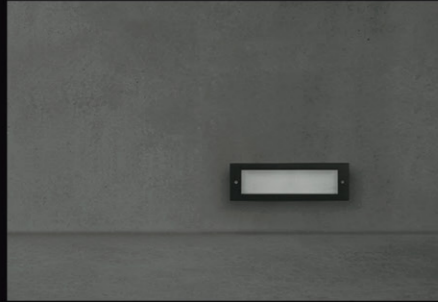


Description

매입형 등기구인 OBLONG-FLAT은 주변 경관디자인에 해가 되지 않도록 심플한 디자인으로 제작하였으며, 건축물의 외벽이나 계단 등에 설치되는 OBLONG-FLAT은 아름다운 경관을 연출할 뿐만 아니라 조도보완을 통해 보행자의 안전을 고려하여 디자인한 제품이다. 또한 SMD 엘이디 광원을 채택하여 긴수명과 환경보호를 동시에 실현시킬 수 있는 조명기구로 건축물, 조경, 공원, 시민의 휴식공간에 배치 및 설계되어 아름다운 빛을 연출할 수 있는 제품이다.

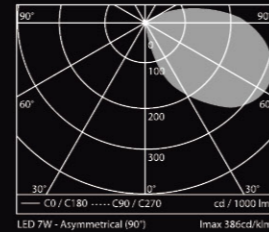

Energy Saving
74%
LED 7W vs FDL 26W

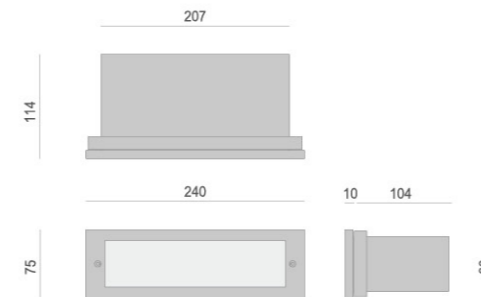

CLASS I 1.03kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
OBLONG FLAT 오블롱 플랫	5002-P7	LED 7W	PCB	AC 220V	210[lm]

- Material :** Body_ aluminum die casting. Diffuser_ 9mm toughened satin tempered glass. Cover frame_ aluminum die casting. Housing_ acrylonitrile butadiene styrene resin box. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Black painted (Standard) / Another paint color on request

