

ONE-WAY SMALL (VL-3006)



Down bracket lights for LED lamps (E-27)

Beam angle	Symmetrical
Luminous flux [lm]	860[lm] - 1,250 [lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등



Description

가장 기본이 되는 벽부등 중에 하나인 ONE-WAY SMALL은 기존 광원 PAR30 75W를 LED 11W로 대체가 가능하며 86%의 에너지 절약 효과가 있다. 또한 조명기구내부에 고조도 반사판을 적용하여 조도보완과 은은하게 퍼지는 조명의 효과로 건축물의 윤곽선을 표현하는데 적당한 제품이다. 온도와 습기에 취약한 엘이디 소자의 특성을 고려하여 완벽한 방열, 방습구조를 갖춘 ONE-WAY SMALL은 크기가 작아 공간 제약을 크게 받지 않는 제품이다.

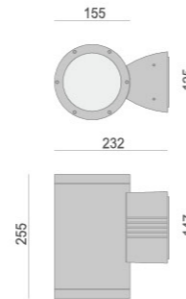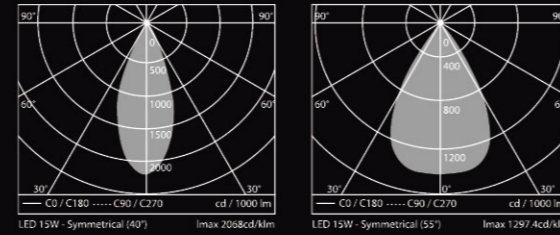

CLASS I 2,16kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
ONE-WAY SMALL	3006-L11	LED PAR30 11W	E-27	AC 220V	860[lm]
원-웨이 스몰	3006-L15	LED PAR30 15W	E-27	AC 220V	1,250[lm]

- Material :** Body_ aluminum die casting. Reflector_ high grade angulate aluminum. Dif-fuser_ 8mm toughened clear tempered glass. Cover frame_ aluminum die casting. Housing box_ aluminum die casting. Attach bracket_ aluminum die casting. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Gray painted (Standard) / Another paint color on request



Energy Saving
86%
LED par30 11W vs Par30 75W