


QUARTER (VL-3011)




Shielded bracket lights for LED PCB type

| | |
|--------------------|-----------------------|
| Beam angle | Symmetrical |
| Luminous flux [lm] | 1,350[lm] - 2,700[lm] |
| Protection Class | IP65 |
| Certification | KS C 7713 _ LED 경관등 |

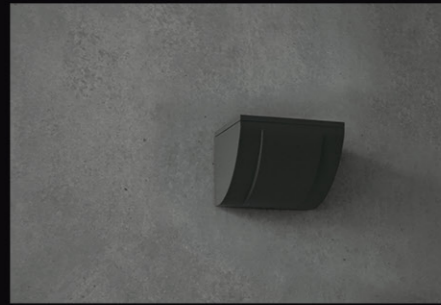


Description

반구 형태의 QUARTER는 벽면에 설치되어 상향 또는 하향으로 강력한 직접조명을 연출이 가능한 조명기구로 파워 엘이디 소자의 속성에 철저히 대비하여, 몸체를 알루미늄으로 자체 방열이 가능하도록 디자인 하였으며, 내구성, 내식성 등이 우수하여 아파트, 교량, 공원 등에 다양한 연출이 가능한 제품이다. 또한 다양한 배광을 구현할 수 있도록 각기 다른 빔각도의 옵틱 렌즈를 설치 할 수 있도록 디자인 하였다.



Energy Saving
49%
LED 18W vs Metal halide 70W

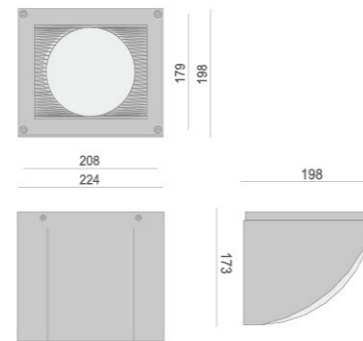

CLASS I 2.85kg

| MODEL | CODE NO. | LAMP | BASE | INPUT | lm/cd |
|---------|----------|---------|------|-------------------|-----------|
| QUARTER | 3011-P18 | LED 18W | PCB | AC 220V or DC 24V | 1,350[lm] |
| 쿼터 | 3011-P36 | LED 36W | PCB | AC 220V or DC 24V | 2,700[lm] |

- Material :** Body_ aluminum die casting. Diffuser_ 3mm toughened tempered glass. Cover frame_ aluminum die casting. Attach bracket_ stainless steel plate. Heat sink_ aluminum die casting. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz and DC 24V
- Options :** Remote divers on request (Dimming, color change)
Cable lengths on request
- Paint Color :** Dark gray painted (Standard) / Another paint color on request

