

TWO-WAY LARGE (VL-3009)



Up & down bracket lights for LED lamps (E-27)

| | |
|--------------------|------------------------|
| Beam angle | Symmetrical |
| Luminous flux [lm] | 2,240[lm] - 2,400 [lm] |
| Protection Class | IP65 |
| Certification | KS C 7713 _ LED 경관등 |



Description

가장 기본이 되는 벽부등 중에 하나인 TWO-WAY LARGE는 기존 광원 PAR38 120W X 2를 LED 20W X 2로 대체가 가능하여 84%의 에너지 절약 효과가 있다. 또한 조명기구 내부에 고조도 반사판을 적용하여 조도보완과 은은하게 퍼지는 조명의 효과가 건축물의 윤곽선을 도드라지게 하는 효과를 연출한다. 온도와 습기에 취약한 열이 디 소자의 특성을 고려하여 완벽한 방열, 방습구조를 갖춘 TWO-WAY LARGE는 빛의 효과를 상쇄시키지 않도록 조화와 균형, 내구성을 충분히 고려하여 디자인한 조명기구이다.

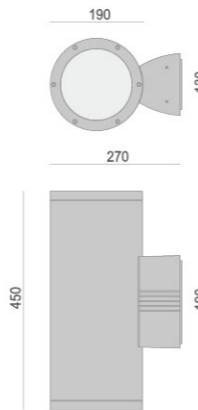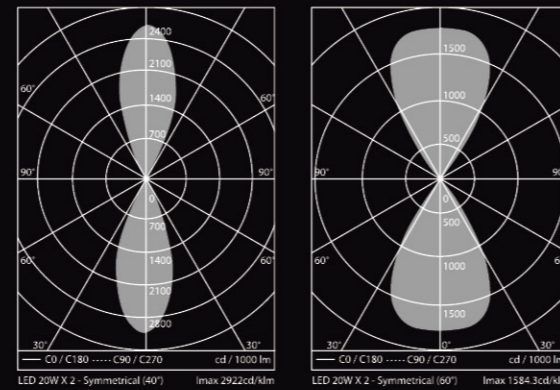

CLASS I 4.2kg

| MODEL | CODE NO. | LAMP | BASE | INPUT | lm/cd |
|---------------|----------|-------------------|------|---------|-----------|
| TWO-WAY LARGE | 3009-L36 | LED PAR38 18W X 2 | E-27 | AC 220V | 2,400[lm] |
| 투-웨이 라지 | 3009-L40 | LED PAR30 20W X 2 | E-27 | AC 220V | 2,240[lm] |

- Material :** Body_ aluminum die casting. Reflector_ high grade angulate aluminum. Dif-fuser_ 8mm toughened clear tempered glass. Cover frame_ aluminum die casting. Housing box_ aluminum die casting. Attach bracket_ aluminum die casting. Gasket and seals_ silicone rubber. Fixings_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Gray painted (Standard) / Another paint color on request



Energy Saving
84%
LED par30 20W x 2 vs Par38 120W x 2