

## ONE-WAY LARGE (VL-3008)



Down bracket lights for LED lamps (E-27)

Beam angle	Symmetrical
Luminous flux [lm]	1,120[lm] - 1,200 [lm]
Protection Class	IP65
Certification	KS C 7713 _ LED 경관등



### Description

가장 기본이 되는 벽부등 중에 하나인 ONE-WAY LARGE는 기존 광원 PAR38 120W를 LED 20W로 대체가 가능하여 84%의 에너지 절약 효과가 있다. 또한 조명기구내부에 고조도 반사판을 적용하여 조도보완과 은은하게 퍼지는 조명의 효과로 건축물 윤곽선을 표현하는데 적당한 제품이다. 온도와 습기에 취약한 엘이디 소자의 특성을 고려하여 완벽한 방열, 방습구조를 갖춘 ONE-WAY LARGE는 빛의 효과를 상쇄시키지 않도록 조화와 균형, 내구성을 충분히 고려하여 디자인한 조명기구이다.

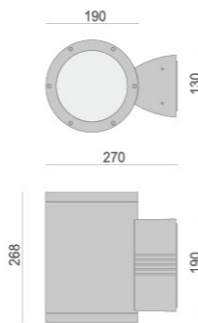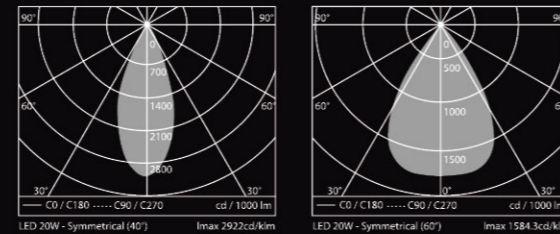

CLASS I 3.18kg

MODEL	CODE NO.	LAMP	BASE	INPUT	lm/cd
ONE-WAY LARGE	3008-L18	LED PAR38 18W	E-27	AC 220V	1,200[lm]
원-웨이 라지	3008-L20	LED PAR30 20W	E-27	AC 220V	1,120[lm]

- Material :** Body\_ aluminum die casting. Reflector\_ high grade angulate aluminum. Dif-fuser\_ 8mm toughened clear tempered glass. Cover frame\_ aluminum die casting. Housing box\_ aluminum die casting. Attach bracket\_ aluminum die casting. Gasket and seals\_ silicone rubber. Fixings\_ stainless steel screws.
- Finishing :** Mechanical and chemical anticorrosion treatment; AKZONOBEL, Polyester, UV resistant, exterior paint system, thermally cured at 200 °C
- Adjustment :** Fixed lighting fixture
- Power :** Electronic power supply unite included
- Input Voltage :** AC 220~240V 60Hz
- Options :** Cable lengths on request
- Paint Color :** Gray painted (Standard) / Another paint color on request



Energy Saving  
84%  
LED par30 20W vs Par38 120W



ONE-WAY LARGE@ 대구, 한국가스공사 본사 신사옥